



HOPPER TRE

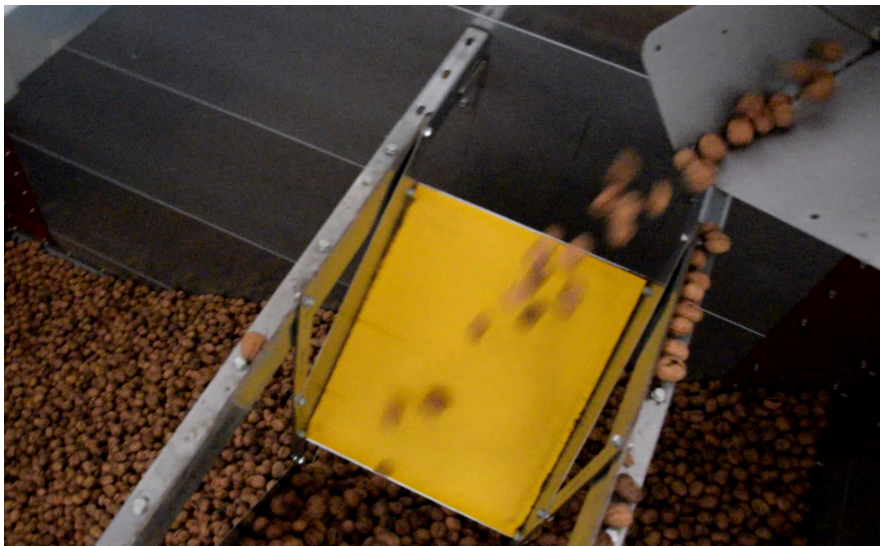

Manufacturer of solutions for the harvest and work of the fruits

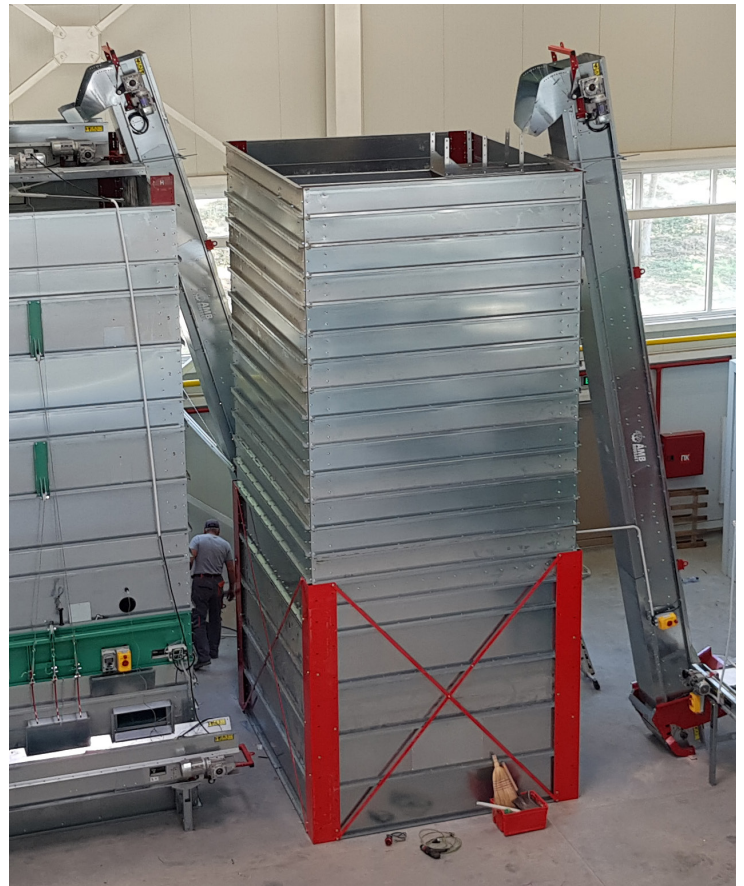

AMB Rousset
impasse du Tilleul
38470 BEAULIEU - France



Tél : +33 (0) 4 76 36 73 73
Fax : +33 (0) 4 76 36 70 82
E-mail : export@ambrousset.com
www.amb-rousset.com

Main Features

Designed on the basis of our multiple stage dryer that have proven itself for more than 10 years, here is the adjustable hopper sold in kit form : Available in 2x2 m or in 2,5x2,5 m, it can store nuts after washing (in that case we can attach a blower to it), before hulling or after drying operations.

Evacuation is carried out using a 0.17 kW vibrator (optional) to regulate the flow rate or by a quick opening.


The hopper's height is available in standard at 1,05 m above the ground but as the set is adjustable, it can easily be placed at ground level or at 1,50 m high so as to pour into an empty shell removal blower. Standard height is at 3 meters but we can increase it's capacity by adding side extensions.

Technical characteristics


	2x2 m	2,5x2,5 m	3x2,5 m
Volume of the funnel	1,76 m ³	3,38 m ³	4,05 m ³
Total volume			
3 m	4,76 m ³	6,30 m ³	7,56 m ³
+ 1 m extension (from above)	8,76 m ³	12,55 m ³	15,06 m ³
+ 2 m extension (from above)	12,76 m ³	18,80 m ³	22,56 m ³

	Drain height
In standard (with manual output)	915 mm
With vibrating output option	1058 mm Ou 1305 mm
With vibrating output option + 500 mm extension kit	1805 mm


Manual output configuration

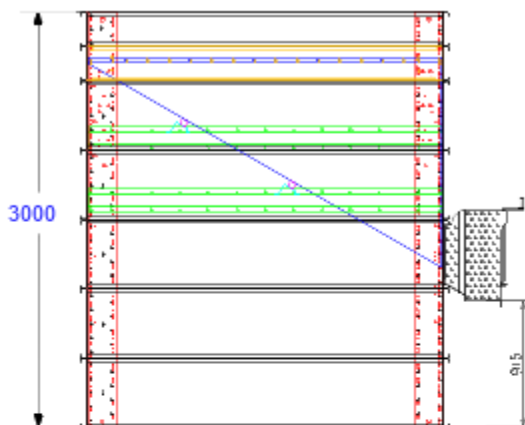

Vibrating output configuration

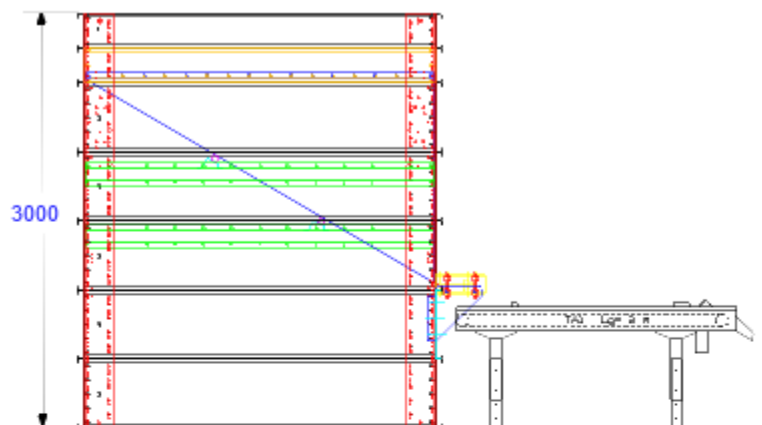

Configuration with SEP dry nuts

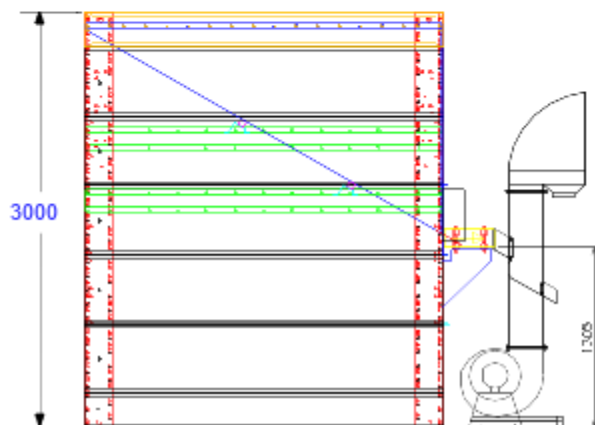

Output configuration at 500mm

