


Yield per hectare	Between 45 minutes and 1h15 per hectare
Engine	DEUTZ Stage V engine without AD Blue
Transmission	Self-propelled hydrostatic drive SAUER DANFOSS 4 speed 4-wheel steering Very flexible steering
Tires	Tire 31-15.5 R15
Gasoline Tank	Gasoil : 100 liters
FONCTIONNEMENT RAMASSAGE	
Harvesting Pick-up	Cylindrical with rubber tabs Ø 900 mm front plate can be lifted and the rotor reversed
Harvesting width	2 m
Sweeping width	Between 2m and 4 m
Lateral blower	Powerful, installed as close as possible to the sweeper, it offers a maximum power for a reduced size
Blower	Adjustable and controllable airflow on the dashboard Circular housing with 2 fans
Sorting	1st pre-sorting of impurities by front chain with bars. 2nd sorting of the leaves by adjustable ventilation (diffuser on the whole width of collection) Smooth inverted belt for leaf evacuation. 3rd final sorting by bar belt or vibrating grid.
Hopper	Hydraulic lifting and tilting Hopper level by ultrasonic sensors Volume : 1 600 liters useful Emptying height : 2,75 m
Standard equipment	All joystick pickup controls - hopper equalizer - leaf evacuator - hopper fill sensor - fire extinguisher - heavy duty filtration
POIDS ET DIMENSIONS	
Length	6,50 m
Width	2,34 m
Height	1,91 m
Weight	4 740 (depending on options)
OPTIONS	
Options	Giro satellite sideways - Crabbing - Lifting with ground wheels - Paris Dakar closed cabin / air conditioned



Manufacturer of solutions for the harvest and work of the fruits 

A M B Rousset
impasse du Tilleul
38470 BEAULIEU - France

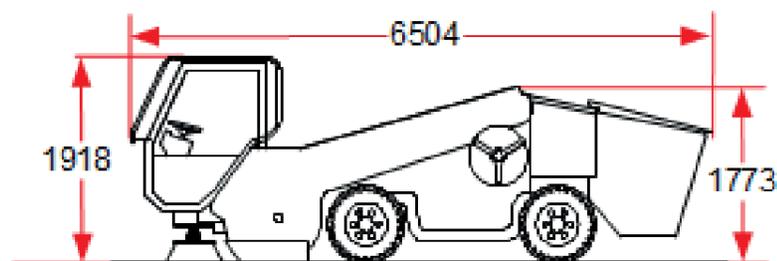

Tél : +33 (0) 4 76 36 73 73
Fax : +33 (0) 4 76 36 70 82
E-mail : export@ambrousset.com
www.amb-rousset.com



→ Deutz Stage V engine



→ Closed Cabin & Air Conditioning option



→ Paris-Dakar option



→ Depth wheel option



→ Sorting chain/grid



→ Width of harvest



→ Crabbing option



→ Sheet metal liftable



HARVESTER
R19