BLOWER SEPARATOR SEP300

Densimetric column








Waste








WIDTH 200



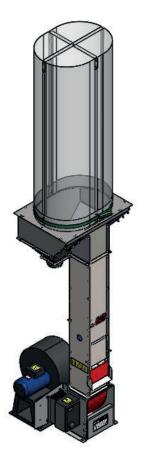



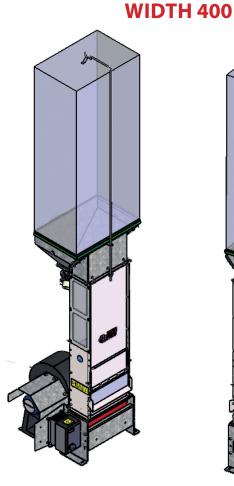

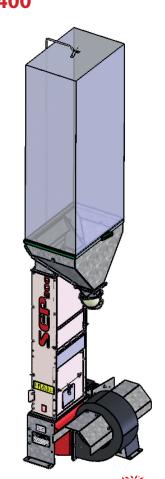

Manufacturer of solutions for the harvest and work of the fruits

A M B R o u s s e t impasse du Tilleul 38470 BEAULIEU - France



Tél: +33 (0) 4 76 36 73 73 Fax: +33 (0) 4 76 36 70 82

 $\hbox{E-mail:} \textbf{export@ambrousset.com}$

www.amb-rousset.com

BLOWER SEPARATOR SCP 900

Densimetric column

General features

With this separator, we can separate by blower the shells and the fruits (kernels) or even the empty nuts and the filled nuts. This separator is also fitting for almonds and hazelnuts. The air flow rate is regulated by a variator.

Advantages :

Suitable for dried walnuts, kernels, dried hazelnuts and almonds.

Separate by density difference every type of waste.

Visualization of the product through the plexi window located on the column.

Technical features

| | Série | Série 900 | |
|------------|---|--|--|
| | Width 200 | Width 400 | |
| Reference | SEP0034 | SEP0036 | |
| Output | 600 kg / hour | 900 kg / hour | |
| Adjustment | Adjustment of the | Adjustment of the air flow by variator | |
| Chassis | Bol | Bolted | |
| Column | removable gri inspection | Stainless steel removable grid for cleaning inspection hatch Plexiglas window for product viewing | |
| Security | Conforms to | Conforms to CE standards | |
| Length | 0,75 m | 0,75 m | |
| Width | 0,95 m | 0,95 m | |
| Height | 3,41 m | 3,41 m | |
| Motor | 0.55 kW three-phase 380V fixed speed | 0.55 kW three-phase 380V fixed speed | |
| | Case holde | Case holder - SEP0037 | |
| Options | Buffer chann | Buffer channel - SEP0039 | |
| | Input c | Input channel | |
| Weight | 82 kg | 110 kg | |

